

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 February 2002 (07.02.2002)

PCT

(10) International Publication Number
WO 02/11136 A1

- (51) International Patent Classification⁷: **G11B 20/00**
- (21) International Application Number: PCT/GB01/03364
- (22) International Filing Date: 26 July 2001 (26.07.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0018577.7 28 July 2000 (28.07.2000) GB
0019970.3 14 August 2000 (14.08.2000) GB
- (71) Applicant (for all designated States except US): **MACROVISION EUROPE LIMITED** [GB/GB]; Woodley House, Crockhamwell Road, Woodley, Reading, Berkshire RG5 3JP (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HEYLEN, Richard, A., A.** [GB/GB]; 227 Otley Road, West Park, Leeds, West Yorkshire LS16 5LQ (GB).
- (74) Agent: **NEEDLE, Jacqueline**; W.H. Beck, Greener & Co., 7 Stone Buildings, Lincoln's Inn, London WC2A 3SZ (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

BEST AVAILABLE COPY

(54) Title: COPY PROTECTION FOR OPTICAL DISCS.

(57) Abstract: A method of copy protecting optical discs uses the differences in capability between the encoder associated with a laser beam recorder and that in currently available CD writers. Digital sum value (DSV) is a property of the encoded data on CDs and, in order to maintain good DSV characteristics, the encoder often has a choice of the merge bits to insert between the symbols which carry the data. An encoder, which controls a laser beam recorder may be able to choose a pattern of merge bits which result in the overall DSV having optimal properties. During mastering of a CD, data patterns are added to the disc to provide an authenticating signature. These data patterns are chosen to cause DSV problems. However, the encoder of the laser beam recorder is able to write the authenticating signature accurately to the glass master. When a CD writer is used to make a copy of the original disc it is provided with user data from the disc, but as this user data is the product of decoding, the information about the pattern of merge bits will have been discarded. Currently available CD writers have been found to have difficulty writing an authenticating signature of the type described without producing a resulting CD which has severe readability problems. Thus, the copy disc written by the CD writer will result in a CD reader returning corrupted data or information signalling a read error.

WO 02/11136 A1

COPY PROTECTION FOR OPTICAL DISCS

The present invention relates to a method of copy protecting optical discs, and to optical discs when so protected. The invention also extends to a method of preventing the mastering of optical discs by non-enabled encoders.

Optical discs, such as the various formats of compact discs (CDs), and of digital versatile discs (DVDs) are increasingly used for carrying information for many different applications. The information encoded onto the optical discs is generally very valuable, and accordingly, they are increasingly copied by counterfeiters. Furthermore, recordable CDs are now available and CD writers for writing the information content from one disc to such recordable discs are now readily available to the domestic consumer. This means that new and effective methods for copy protecting the optical discs are required.

There is described, for example, in WO98/57413 a method of providing an optical disc with an authenticating signature. This authenticating signature is arranged so that it is not, or cannot be, copied by available machines for reading and writing data from CDs. For example, in WO98/57413, a sector of a CD is provided with a pattern of errors which cannot be corrected by the error correcting rules and thereby constitutes an uncorrectable sector or "bad sector" on the disc. The existence of the expected bad sector is taken as an authenticating signature and is used to identify a genuine disc.

The present invention seeks to provide a method of copy protecting optical discs by employing an authenticating signature. An authenticating signature of the present invention may be used alone, or may be used with a bad sector signature as described, for example, in WO98/54713, or with other authenticating signatures or with other copy protection means.

According to a first aspect of the present invention there is provided a method of copy protecting optical discs, the method comprising using an authenticating signature made up of data patterns arranged such that the signature cannot generally be accurately written onto a disc by a writer for recordable discs, the method comprising adding the authenticating signature onto an optical disc during its mastering process.

The present invention utilises the inherent limitations of currently available CD writers. Thus, the applicants have found that it is possible to provide an authenticating signature on a disc which, because of its size and/or its nature, cannot be accurately written onto a disc by a writer for recordable discs such that it is reliably readable. However, the much more sophisticated encoders used in mastering houses, for example, the encoder which controls a laser beam recorder, can be controlled to accurately write the authenticating signature to the glass master.

The encoder associated with a laser beam recorder has a relatively large amount of memory and processing power at its disposal. Specifically, the encoder uses sophisticated algorithms to analyse the data and authenticating signature which are to be written to the disc. The purpose of these algorithms is to ensure that this data and authenticating signature are encoded onto the glass master in a manner which ensures that the data and authenticating signature on the discs produced using this glass master can be read correctly by all CD readers. The encoder chooses the merge bits which are interspersed in the encoded data and authenticating signature as part of the encoding process and the chosen merge bit pattern ensures the readability of the replica discs made from the glass master. These sophisticated encoders can compromise the readability of one area of disc slightly, to ensure the readability of another area of disc, the overall effect being to ensure that the whole disc has a uniformly high readability.

By contrast, commercially available CD writers are limited in the processing power and memory which can be brought to bear on the problem of encoding the data. Specifically, the encoder built into a CD writing device contains simpler encoding algorithms because complicated algorithms require more processing power, more memory and they are more expensive to design, write and debug which reduces the profit margin on the writer. These simpler decoding algorithms may not make the ideal choices for merge bits even when the better choices are readily available. If one area of disc is easy to encode so as to ensure high readability and the following region is difficult to encode and would have a low readability, the simple encoders in CD writers do not have the foresight to trade-off the readability of one area with another and the result is that the easily encoded region is encoded well and the region which is

difficult to encode is encoded badly and when the disc is read, errors are found in this latter region.

It would, of course, be possible to provide special or customised encoders to apply the authenticating signature to the optical disc. However, the applicants have found that they can add the authenticating signature without the need for any special equipment. A method of the invention comprehends the use of existing, customised and/or special encoders.

A copy protection method of an embodiment of the invention may simply require that the existence of corrupted or otherwise incorrect data in a particular sector on an optical disc be used to signify that that disc is not original whereby its use may be prevented.

However, in a preferred embodiment, successful operation of a disc requires that the disc be present in the drive and that a correct signature be readable therefrom.

In a presently preferred embodiment, the data patterns of the authenticating signature are chosen to cause digital sum value (DSV) problems for CD writers. Thus, it is required that the data patterns can be encoded and written to a glass master by a laser beam recorder with good readability, but that recording the patterns using a CD writer produces an encoding which would have DSV problems, and hence cause data errors on a CD-R produced by the CD writer. When the data patterns on the CD-R are subsequently read by a drive for CDs and other optical discs, the DSV can accumulate or decrement, and the resultant DSV can cause problems for the drive. Thus, the adverse DSV characteristics may cause the drive to report errors and/or fail to return the correct information.

It will be appreciated that it is generally required to encode data onto a disc such that the DSV has as low a magnitude as possible. In an embodiment, the data patterns are chosen to ensure that the DSV has a significant absolute value, that is, has an absolute magnitude which is significantly greater than would be usual.

In one embodiment, the data patterns which are chosen to cause DSV problems are repeated patterns of values. It is additionally and/or alternatively possible to calculate the values to ensure that CD writers will encounter DSV problems.

5

Additionally and/or alternatively, the size of the data patterns causing the DSV problems may be a predetermined amount, for example, in excess of 270,000 bytes.

10

Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.

15

In this respect, it is currently thought that it is the rate of change of DSV, rather than the absolute values thereof, which are most effective in causing the DSV problems.

20

Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

25

It will be appreciated that a CD writer will generally be unable to accurately write the chosen data patterns of the authenticating signature to a copy disc. However, it is required that normally available CD drives can play or read original discs with the authenticating signature without any problems. In this respect, it has been found that most drives able to play or read CDs can play or read original discs without difficulty, and it is thought that the choice of merge bits made by the encoder used is capable of reducing the risk of DSV problems during the reading of original discs.

30

In accordance with an embodiment of a method of the invention, the authenticating signature is also made up of sectors containing only zeros which are provided both before and after sectors containing the chosen data patterns.

35

It will be appreciated that, in the main, the sectors of zeros will be taken together with the sectors of the data patterns during reading of the disc

whereby the encoder used in the mastering process is given time to make an optimum choice of the merge bits. These padding areas of zeros can also facilitate normal play of an original optical disc.

5 The present invention also extends to a copy-protected optical disc having an authenticating signature which has been applied thereto during mastering, wherein the authenticating signature is made up of data patterns arranged such that the signature cannot generally be accurately written onto a disc by a writer for recordable discs.

10

The authenticating signature is added to an optical disc during its mastering process and the data patterns thereof have a size and/or a nature which ensures that they cannot be accurately written by a CD writer.

15 According to a further aspect of the present invention there is provided an optical disc having data patterns thereon which have been chosen to cause DSV problems for CD writers.

20 Specifically, the data patterns on the optical disc, which may be used as a blocking file or an authenticating signature, cannot be accurately written by a CD writer.

25 It is required that the data patterns can be encoded and written to a glass master by an encoder for a laser beam recorder with good readability, but that recording the patterns using a CD writer produces an encoding which would have DSV problems, and hence cause data errors on a CD-R produced by the CD writer.

30 It will be appreciated that it is generally required to encode data onto a disc such that the DSV has as low a magnitude as possible. In an embodiment, the data patterns are chosen to ensure that the DSV has a significant absolute value, that is, has an absolute magnitude which is significantly greater than would be usual.

35 In one embodiment, the data patterns which are chosen to cause DSV problems are repeated patterns of values. It is additionally and/or alternatively

possible to calculate the values to ensure that CD writers will encounter DSV problems.

5 Additionally and/or alternatively, the size of the data patterns causing the DSV problems may be a predetermined amount, for example, in excess of 270,000 bytes.

10 Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.

15 In this respect, it is currently thought that it is the rate of change of DSV, rather than the absolute values thereof, which are most effective in causing the DSV problems.

 Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

20 It will be appreciated that conventional methods for encoding data onto optical discs are specifically designed to reduce the likelihood that data patterns will be applied to the discs which will provide DSV problems.

25 It would, of course, be possible to provide special or customised encoders to apply the authenticating signature described to an optical disc. However, the applicants have found that they can add the authenticating signature without the need for any special equipment. The present invention clearly covers the use of existing, customised, and/or special encoders.

30 In embodiments of the invention, the data patterns of the authenticating signature have been applied to an optical disc during its mastering process. Specifically, the data patterns are chosen to cause digital sum value (DSV) problems, and are scrambled using the Exclusive Or (XOR) algorithm which is to be used in the mastering process, the mastering process then comprises the steps of applying the scrambled data patterns to the optical disc such that the
35 scrambled data patterns are themselves scrambled using the XOR algorithm

whereby the scrambling process outputs the chosen data patterns for application to the optical disc.

5 In a presently preferred embodiment, the chosen data patterns are repeated patterns of values which are known to cause DSV problems. Of course, the traditional encoding process for the data applied to optical discs also interleaves data such that the repeated patterns of values would conventionally be distributed across several sectors.

10 In accordance with a preferred embodiment of the present invention, the chosen data patterns are copied to a plurality of sectors, for example, to three or more sectors on the optical disc.

15 According to a further aspect of the present invention there is provided a method of authenticating a copy protected optical disc having an authenticating signature, the method comprising the steps of requiring a disc drive to locate and accurately read the authenticating signature on the disc in order to enable operation of the disc, wherein the authenticating signature is made up of data patterns arranged such that the signature cannot generally be accurately
20 written onto a disc by a writer for recordable discs.

The authenticating signature on the copy protected disc is preferably of data patterns chosen to cause DSV problems as set out above. The data patterns of the authenticating signature may have any, or any combination of,
25 the characteristics defined above.

The copy protected disc to be authenticated by the method defined may have any, or any combination of, the features defined above.

30 The invention also extends to a method of enabling the mastering of an optical disc by an enabled encoder, where a recordable disc, from which a drive associated with the encoder is to read data during the mastering process, carries a blocking file made up of data patterns which cannot generally be accurately read by a disc drive, the method comprising the step of providing on
35 the recordable disc information as to the existence and location of the blocking

file, the drive associated with the encoder being arranged not to read the blocking fire in response to said existence and location information.

5 In accordance with a still further aspect of the present invention, there is provided a recordable disc for use in a process for mastering optical discs, wherein the recordable disc carries the data to be carried on the optical discs, wherein the recordable disc carries a blocking file made up of data patterns added to a recordable disc during the authoring or premastering process, and wherein the data patterns cannot generally be accurately read by a disc drive.

10

In a presently preferred embodiment, the data patterns of the blocking file are chosen to cause digital sum value (DSV) problems. For example, the data patterns have a DSV which has a significant absolute value.

15

In one embodiment, the data patterns which are chosen to cause DSV problems are repeated patterns of values. It is additionally and/or alternatively possible to have values calculated to provide the DSV required.

20

Additionally and/or alternatively, the size of the data patterns producing the required DSV may be a predetermined amount, for example, in excess of 270,000 bytes.

25

Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.

30

Additionally, and/or alternatively, the data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

It will be appreciated that conventional methods for encoding data onto discs are specifically designed to reduce the likelihood that data patterns will be applied to the discs which will provide DSV problems.

35

It would, of course, be possible to provide special or customised encoders to apply the blocking file described to the recordable disc. However,

the applicants have found that they can add the blocking file without the need for any special equipment.

In embodiments of the invention, the data patterns of the blocking file
5 have been applied to a recordable disc during its premastering process.
Specifically, the data patterns are chosen to cause digital sum value (DSV)
problems, and are scrambled using the Exclusive Or (XOR) algorithm which is
to be used in the premastering process, the premastering process then
comprises the steps of applying the scrambled data patterns to the disc such
10 that the scrambled data patterns are themselves scrambled using the XOR
algorithm whereby the scrambling process outputs the chosen data patterns for
application to the recordable disc.

Embodiments of the present invention will hereinafter be described, by
15 way of example, with reference to the accompanying drawings, in which:

Figure 1 shows the surface of a compact disc, very much enlarged,
showing the pits thereon,

Figure 2 shows a cross section of a pit illustrating the data associated
therewith,

20 Figure 3 shows the DSV associated with the pits and lands illustrated,

Figure 4 shows schematically a process for encoding data onto a CD,

Figure 5 shows schematically a mastering process for a CD in which an
authenticating signature is added to the disc,

Figure 6 shows schematically the reading of an original disc and the
25 writing of a copy disc by a CD writer, and

Figures 7a and 7b illustrate an example of data patterns used in copy
protection methods of the invention.

In the description which follows, the invention is described specifically by
30 reference to the encoding of a CD-ROM and hence with reference to the use of
the present invention for copy protecting such a CD-ROM. However, it will be
appreciated that the present invention is not limited to use with a CD-ROM and
finds application to all data carrying optical discs. Specifically, the invention is
applicable to all formats of CDs and to all formats of DVDs.

Furthermore, the description which follows gives one example of the encoding of data onto a CD. Other encoding modes are possible and it will be appreciated that the invention is not limited to the encoding mode.

5 Figure 1 shows an enlarged view of part of a CD showing the pits 6 thereon. As is well known, these pits extend along a spiral track on the surface of the disc and are separated by lands.

10 Figure 2 shows a section through a pit 6 and land 8 illustrating how data is encoded on a CD. The pits and lands do not represent binary 0s and 1s, but instead represent transitions from one state to another. The data signal is stored in NRZI form (Non-Return to Zero inverted), where the signal is inverted every time a 1 is encountered. Figure 2 shows the binary value 00100010.

15 The data stream always consists of pits and lands of at least 3 bits and at most 11 bits long. This is sometimes referred to as a 3T-11T where T is a 1 bit period. A 3T pit has the highest signal frequency (720khz) and an 11T pit has the lowest signal frequency (196khz).

20 A data signal is derived from the lengths of the pits and lands. The produced signal forms a square wave known as an EFM signal. The digital sum value (DSV) is the running difference between the number of T values where the EFM represents a pit and the number of T values where the EFM represents a land. As each data bit is read, the DSV is incremented or
25 decremented depending upon whether the data bit corresponds to a pit or a land.

30 As is indicated in Figure 3, the DSV is determined by assigning the value +1 to each land T, and -1 to each pit T. Ideally, the DSV should stray as little as possible from the zero level. If the DSV has a rapid rate of change over a significant period of time or if the DSV has substantial low frequency components then the transitions in the EFM signal may be shifted from their ideal values and/or the ability of tracking and focus circuits in CD drives to maintain optimal head positioning may be compromised. This typically causes
35 read failures from the CD.

Original data, in 8 bit bytes, is passed through a process called EFM encoding to produce the 14 bit symbols. The set of 14 bit symbols is especially designed:

- 5 to level out the number of pits and lands, to help maintain balanced DSV; and
- to ensure that there are no symbols which break the EFM coding scheme of 3T-11T.

10 However, it is still possible to have two 14 bit symbols, which when joined together would compromise the coding scheme. Accordingly, a set of 3 merge bits are added between each 14 bit symbol to ensure that there are no violations of the 3T-11T coding scheme and to ensure that a suitable DSV is maintained.

15 The merge bits contain no useful data and the algorithm used to generate their values can differ from drive to drive. Once read, the merge bits are discarded and the data contained in the 14 bit symbol is passed onto the next process.

20 The above describes the basic encoding scheme for a CD and will be known to those skilled in the art. Accordingly, further explanation thereof is not required.

25 As set out above, embodiments of this invention utilise the inherent limitations of currently available CD writers, and in particular the differences in capability between the encoder associated with a laser beam recorder and that in a CD writer.

30 The encoding of a CD is subject to two rigorous conditions and one more vague requirement. The first strict rule is that the encoded data must decode without errors in the data which the author wanted on the disc. The second strict rule is that the encoding must obey the run-length limiting rules so that no pits or lands are longer than 11T or shorter than 3T. The vague
35 requirement is that the DSV characteristics of the disc should be as good as possible.

As set out above, DSV is a property of the encoded data. It is a running difference between the number of pit T states and the number of land T states. It is desirable that the DSV should not have high absolute values, should not change rapidly, and should not have low frequency components. This latter
5 requirement means that the DSV should not oscillate in a regular fashion.

In order to maintain good DSV characteristics, the encoder often has a choice in the merge bits to insert between the symbols which carry the data. When encoding certain special patterns of data, the encoder has a very much
10 reduced ability to choose merge bits because the run-length limiting rules place limitations on the merge bits which can precede or follow certain symbols. The encoder effectively loses much of its control of the DSV while this data is being encoded. It is critical that it chooses correctly in the few locations where it has a choice.

15 A sophisticated encoder, such as those which control laser beam recorders, may have the foresight, or can be designed, to choose a pattern of merge bits which is not optimal for the immediate locality where this area is followed by one in which the run length limiting rules dictate the merge bits.
20 The result will be that the overall DSV for the two areas will have better properties. The ability to detect upcoming areas where the merge bit choices are limited is called "look-ahead". Encoders with a larger look-ahead will be able to make more preparations for encoding the troublesome data and hence the overall encoding will be better. CD writers typically have very little ability to
25 look ahead and hence when they lose control of the DSV, it is more likely to result in an unreadable disc.

The applicants have identified a number of values which are capable of causing DSV problems because of their EFM pattern at the pits and lands
30 level. When the patterns for these values are processed through the EFM decoder of a CD drive, the DSV accumulates or decrements and this can result in read failures. Of course, and as indicated above, the encoding process for a CD is designed to prevent values capable of causing DSV problems occurring in the EFM pattern as well as providing robust error correction.

Figure 4 shows schematically the encoding of data onto a CD in the form of pits 6 and lands 8. Initially, and as indicated, there are 2048 bytes of user data. This is indicated at 10. Then, as illustrated at 12, a sync block, a header, an error detection code (EDC) 14 and error correction code (ECC) 16 are added to those original 2048 bytes.

To help ensure that the final arrangement of pits and lands meet the EFM coding rules for DSV, the data at 12 is then scrambled as shown at 18 using an XOR algorithm. The scrambling seeks to reduce the likelihood that plausible repeating patterns of user data would inadvertently correspond to DSV problem causing patterns by effectively randomising the data across a sector.

As indicated at 20, the data is then passed to the CIRC encoder. The CIRC encoder, by means of delays, distributes the data across a number of sectors. The data is then passed to the EFM encoder 22 where it is converted into the pattern of 1's and 0's. It is the EFM encoded data, which now incorporates the merge bits, which is converted into the series of pits and lands on the disc.

Clearly, the scrambling is provided to create a pattern of values that do not cause DSV problems. It is therefore necessary to overcome the effects of those processes in order to apply to the disc values which are known to cause DSV problems.

The data patterns intended to provide an authenticating signature are XOR'd with the same pattern of scrambling data as is used in the scrambling process indicated at 18. This scrambled data is then subjected to the process indicated in Figure 4. It will be appreciated that when the scrambled data is subjected to the XOR algorithm on encoding, each byte from the sector will be returned to its original value.

The mixing effect of the CIRC encoder, which is indicated at 20, can be partially overcome by writing multiple copies of the sector. For example, sectors N+1, N+2, N+3 and N+4 will contain the same user data as sector N.

To provide an authenticating signature for a CD, data patterns are chosen which are known to cause DSV problems. For example, and as described above, the data patterns may include sectors filled with repeated values. The glass master is created to have the authenticating signature on it by overcoming the effects of the XOR scrambling and the CIRC encoding as described above.

In this respect, and as indicated in Figure 5, during the mastering process, data 40 for the glass master and data 42 for the authenticating signature are provided to an encoder 44 associated with a laser beam controller 46. The controller 46 operates the recording laser 48 to write the data to a glass master 50. The data 40 and the data 42 may be provided on respective CD-Rs, or on the same CD-R, for example. Preferably, at least the data patterns of the authenticating signature are encrypted on the recordable CD so as to be readable. The data patterns are decrypted by the encoder 44, and are then subjected to scrambling and CIRC encoding, as described. The encoder 44 writes the authenticating signature accurately to the glass master 50. As set out above, it is the encoder 44 which chooses the merge bits to ensure that suitable DSV characteristics are maintained, and the encoder associated with a laser beam recorder is generally able, or can be arranged, to make a choice of merge bits which ensure the readability of the resultant replica discs made from the glass master. These original replica CDs are replicated from the glass master in conventional manner.

Pre and post padding areas consisting of blank sectors may also be added to the recordable disc around the authenticating signature. These may be helpful to the encoder used in the mastering process in providing time which the encoder can use to make an optimum choice of merge bits. In addition, the use of padding areas of blank sectors also increases the combinations of authenticating signature available. In presently preferred embodiments, for example, an authenticating signature may comprise several sectors having repeated values interspersed by padding areas.

Figures 7a and 7b illustrate schematically one example of data patterns which can be used in methods of the invention. Specifically, Figure 7a shows the first four bytes only of a 2048 byte block 10 of user data. This data is

changed, as described above, to cause DSV problems, and Figure 7b shows the first four bytes only of a 2048 byte data pattern 10' resulting from the changes to the user data 10.

5 As set out above, it has been found that the encoders of currently available CD writers are not able to accurately write such an authenticating signature to a copied disc. On the copied disc for example, the authenticating signature may be corrupted or unreadable.

10 When a CD writer, as 52 in Figure 6, is used to make a copy of an original disc 60 with the authenticating signature, it is provided with the user data from the original disc by a drive incorporating, for example, a decoder 62 and an output 64. The user data decoded from the original disc 60 will not include the information about the pattern of merge bits as these are decoded
15 by the decoder 62. The decoded data is input to the CD writer 52 where it is encoded by encoder 54 and then written to a CD-R 70 by way of the recording laser 58 and its controller 56. Although the process used by the CD writer looks the same as that used to produce the glass master 50, as set out above, currently available CD writers are found to have difficulty writing an
20 authenticating signature of the type described without producing a resulting CD 70 which has severe readability problems. Accordingly, a CD writer will write a disc which, when read will result in the CD reader returning corrupted data or information signalling a read error.

25 The effect of the data copied onto a copy disc, as 70, will vary from drive to drive. Thus, the corrupted or unreadable authenticating signature on the copied disc may cause read failures and this may be used alone to provide copy protection for an original disc.

30 However, it is presently preferred that the authenticating signature is used to enable the play of an original disc. In this respect, it is required that the original disc has to remain in the drive. When data from the disc is to be used, software carried by the disc requires the drive to locate and read the authenticating signature and enables play of the disc only when that
35 authenticating signature agrees with the rendition thereof in the software.

The techniques as described herein may also be adapted to control the encoders which are able to make glass masters from the contents of a recordable CD. In this respect, a recordable CD is premastered to carry the publisher's data 40 and it may also carry authenticating instructions. However, an authenticating signature 42, for example, as described in WO98/54713 for use with those authenticating instructions is generally only added during mastering and it is important, therefore, that encoders which do not add the authenticating signature are prevented from making a glass master.

To prevent the use of a non-enabled encoder in mastering, data patterns as described are added to the recordable CD carrying the data 40 and, in addition, information as to the existence and location of the data patterns is provided in the primary volume descriptor of the recordable CD. However, in this case, the nature and/or size of the data patterns is chosen to ensure that DSV problems are caused when the recordable CD is read such that the data patterns define a blocking file.

An enabled encoder, as 44, is arranged to decode the information in the primary volume descriptor and, as a result, does not attempt to read the blocking file during the mastering process. On the glass master, 50, the enabled encoder 44 will write sectors of zero's to replace the sectors which contained the blocking file. However, a non-enabled encoder processes the blocking file along with the rest of the data on the recordable CD. When the recordable CD is read in preparation for the commencement of writing the glass master, the DSV problems caused by the existence of the blocking file will cause the CD reader to signal a read error. This will prevent the mastering process on a non-enabled encoder.

It will be appreciated that variations in, and modifications to the embodiments as described and illustrated may be made within the scope of this application.

CLAIMS

1. A method of copy protecting optical discs, the method comprising using an authenticating signature made up of data patterns arranged such that the signature cannot generally be accurately written onto a disc by a writer for recordable discs, the method comprising adding the authenticating signature onto an optical disc during its mastering process.
2. A method as claimed in Claim 1, wherein the existence of corrupted or otherwise incorrect data in a particular sector on an optical disc is to be used to signify that that disc is not original whereby its use may be prevented.
3. A method as claimed in Claim 1, wherein successful operation of a copy protected disc requires that the disc be present in the drive and that a correct signature be readable therefrom.
4. A method as claimed in any preceding claim, wherein the data patterns of the authenticating signature are chosen to cause DSV problems for CD writers.
5. A method as claimed in Claim 4, wherein the data patterns are chosen to ensure that the DSV has a significant absolute value.
6. A method as claimed in Claim 4 or Claim 5, wherein the data patterns which are chosen to cause DSV problems are repeated patterns of values.
7. A method as claimed in any of Claims 4 to 6, wherein the size of the data patterns causing the DSV problems is a predetermined amount.
8. A method as claimed in any of Claims 4 to 7, wherein the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.
9. A method as claimed in any of Claims 4 to 8, wherein data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

10. A method as claimed in any preceding claim wherein the authenticating signature is also made up of sectors containing only zeros which are provided both before and after sectors containing the chosen data patterns.
- 5 11. A copy-protected optical disc having an authenticating signature which has been applied thereto during mastering, wherein the authenticating signature is made up of data patterns arranged such that the signature cannot generally be accurately written onto a disc by a writer for recordable discs.
- 10 12. A copy protected optical disc as claimed in Claim 11, wherein the data patterns of the authenticating signature have a size and/or a nature which ensures that they cannot be accurately written by a CD writer.
13. A copy protected optical disc as claimed in Claim 11 or Claim 12,
15 wherein said data patterns have been chosen to cause DSV problems for CD writers.
14. A copy protected optical disc as claimed in Claim 13, wherein the data patterns are chosen to ensure that the DSV has a significant absolute value.
20
15. A copy protected optical disc as claimed in Claim 13 or Claim 14, wherein the data patterns which are chosen to cause DSV problems are repeated patterns of values.
- 25 16. A copy protected optical disc as claimed in any of Claims 13 to 15, wherein the size of the data patterns causing the DSV problems may be a predetermined amount.
17. A copy protected optical disc as claimed in any of Claims 13 to 16,
30 wherein the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.
18. A copy protected optical disc as claimed in any of Claims 13 to 17,
35 wherein the data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

19. A copy protected optical disc as claimed in any of Claims 13 to 18, wherein the chosen data patterns have been copied to a plurality of sectors on the optical disc.

5 20. A method of authenticating a copy protected optical disc having an authenticating signature, the method comprising the steps of requiring a disc drive to locate and accurately read the authenticating signature on the disc in order to enable operation of the disc, wherein the authenticating signature is made up of data patterns arranged such that the signature cannot generally be
10 accurately written onto a disc by a writer for recordable discs.

21. A method of authenticating a copy protected optical disc as claimed in Claim 20, wherein the authenticating signature on the copy protected disc is of data patterns chosen to cause DSV problems.

15

22. A method of enabling the mastering of an optical disc by an enabled encoder, where a recordable disc, from which a drive associated with the encoder is to read data during the mastering process, carries a blocking file made up of data patterns which cannot generally be accurately read by a disc
20 drive, the method comprising the step of providing on the recordable disc information as to the existence and location of the blocking file, the drive associated with the encoder being arranged not to read the blocking file in response to said existence and location information.

25 23. A recordable disc for use in a process for mastering optical discs, wherein the recordable disc carries the data to be carried on the optical discs, wherein the recordable disc carries a blocking file made up of data patterns added to a recordable disc during the authoring or premastering process, and wherein the data patterns cannot generally be accurately read by a disc drive.

30

24. A recordable disc for use in a process for mastering optical discs as claimed in Claim 23, wherein the data patterns of the blocking file are chosen to cause DSV problems.

35 25. A recordable disc as claimed in Claim 24, wherein the data patterns have a DSV which has a significant absolute value.

26. A recordable disc as claimed in Claim 24 or Claim 25, wherein the data patterns which are chosen to cause DSV problems are repeated patterns of values.

5

27. A recordable disc as claimed in any of Claims 24 to 26, wherein the size of the data patterns producing the required DSV may be a predetermined amount.

10

28. A recordable disc as claimed in any of Claims 24 to 27, wherein the data patterns which are chosen to cause DSV problems are arranged to have a DSV which has a rapid rate of change.

15

29. A recordable disc as claimed in any of Claims 24 to 28, wherein the data patterns which are chosen to cause DSV problems are arranged to produce a DSV which has a substantial low frequency component.

20

30. A method of copy protecting optical discs substantially as hereinbefore described with reference to the accompanying drawings.

31. A copy protected disc substantially as hereinbefore described with reference to the accompanying drawings.

25

32. A method of authenticating a copy protected optical disc substantially as hereinbefore described with reference to the accompanying drawings.

33. A method of enabling the mastering of an optical disc substantially as hereinbefore described with reference to the accompanying drawings

30

34. A recordable disc for use in mastering optical discs substantially as hereinbefore described with reference to the accompanying drawings

1 / 5

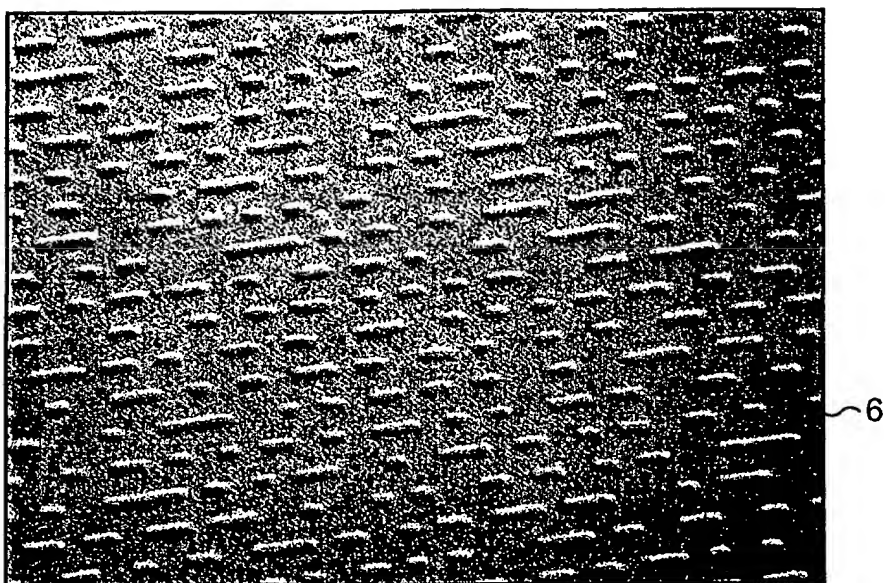


FIG. 1





FIG. 2

Pits and lands



Corresponding DSV

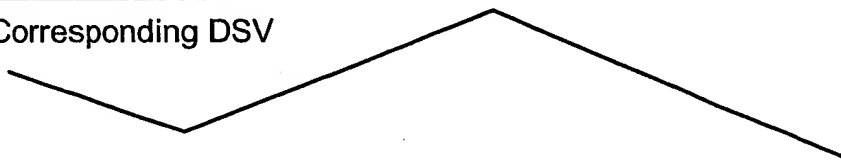

-1 -1 -1 -1 -1 +1 +1 +1 +1 +1 +1 -1 -1 -1 -1 -1 -1 -1 -1

FIG. 3

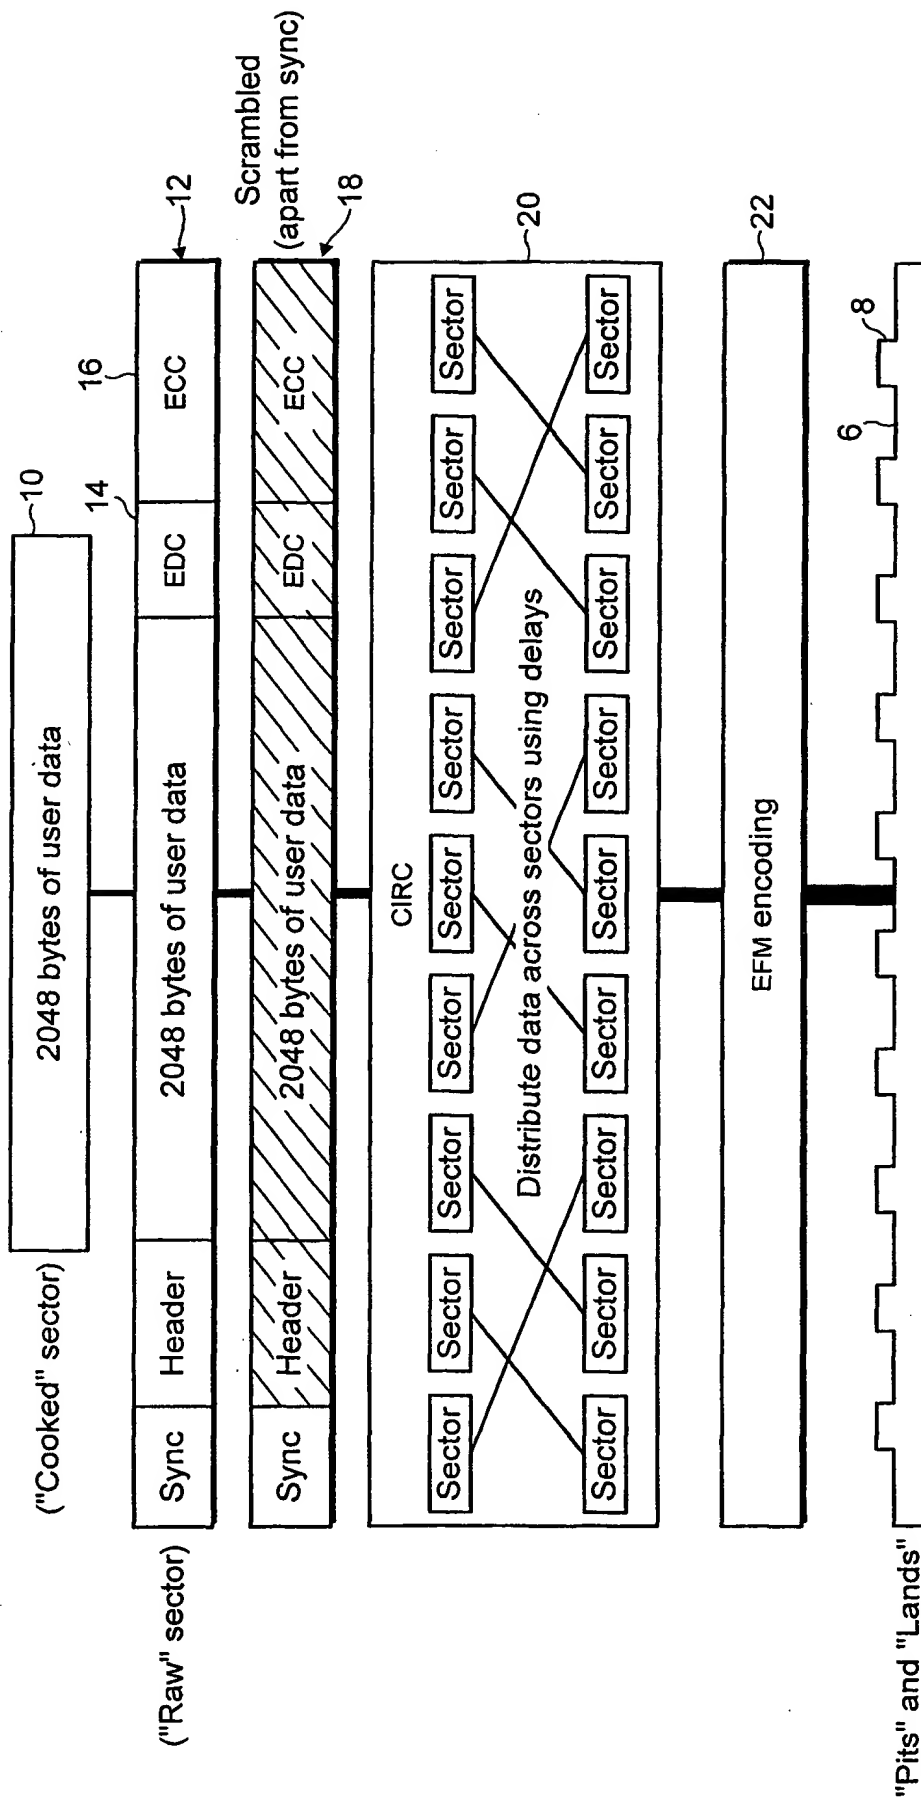


FIG. 4

3 / 5

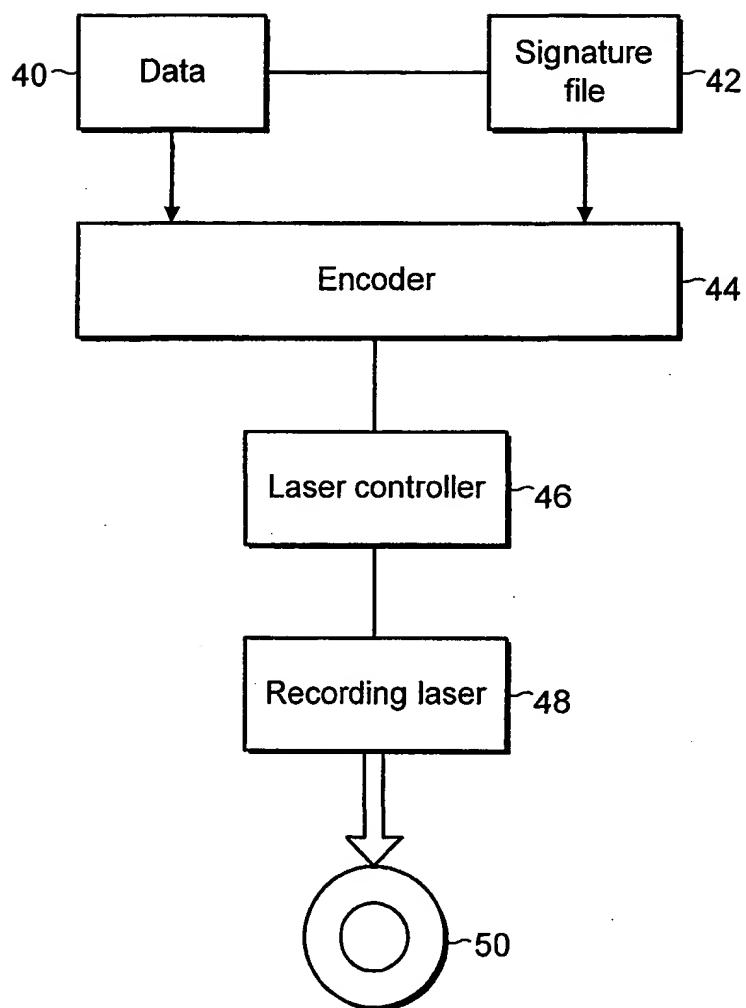


FIG. 5

4 / 5

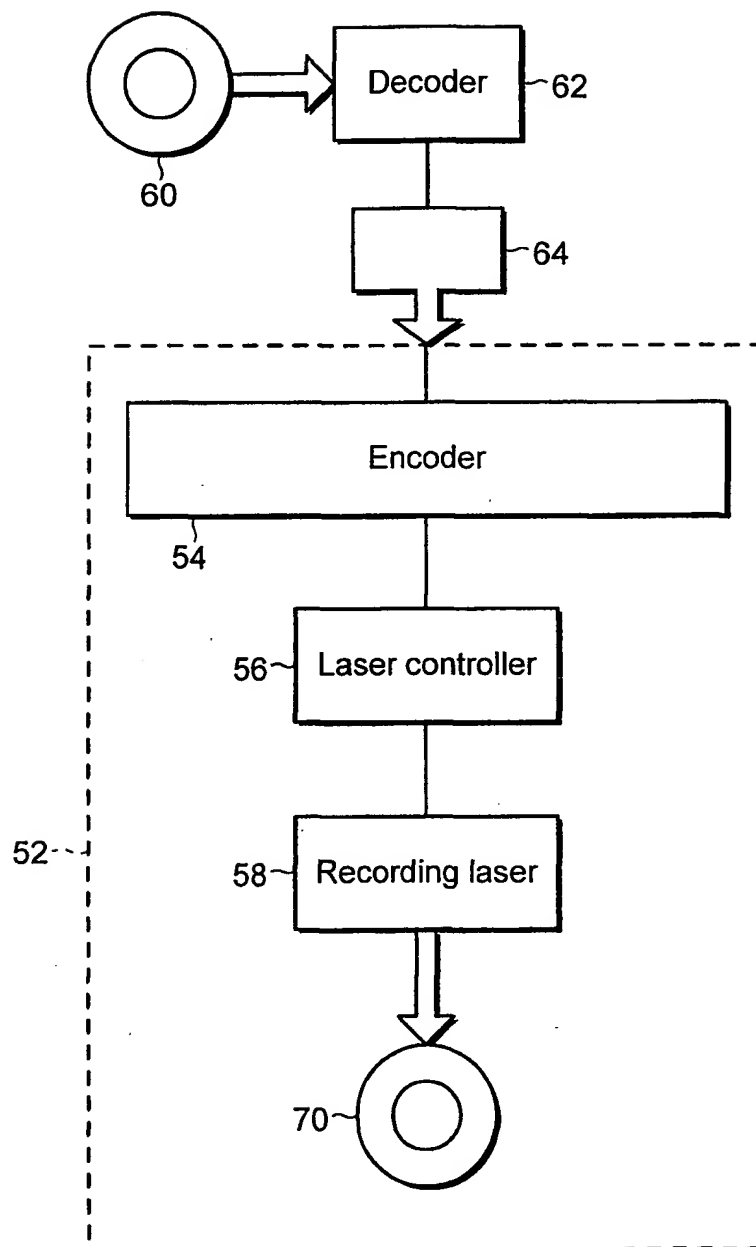


FIG. 6

FIG. 7a

01101000 00101101 01101000 00011010... 10



FIG. 7b

01101000 0000100 01101000 0000100... 10'

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G11B20/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 918 326 A (HEWLETT PACKARD CO) 26 May 1999 (1999-05-26) column 5, line 43 -column 9, line 9 ---	1-29
X	US 5 699 434 A (HOGAN JOSH) 16 December 1997 (1997-12-16) column 4, line 52 -column 7, line 30 ---	1-29
A	SCHOUHAMER IMMINK K A: "EFMPLUS: THE CODING FORMAT OF THE MULTIMEDIA COMPACT DISC" IEEE TRANSACTIONS ON CONSUMER ELECTRONICS, IEEE INC. NEW YORK, US, vol. 41, no. 3, 1 August 1995 (1995-08-01), pages 491-497, XP000539497 ISSN: 0098-3063 cited in the application ---	

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

12 October 2001

Date of mailing of the international search report

25/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Damp, S

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 854 482 A (SGS THOMSON MICROELECTRONICS) 22 July 1998 (1998-07-22) ---	
A	WO 00 74053 A (DILLA LTD C ;EDWARDS ROGER (GB)) 7 December 2000 (2000-12-07) ---	
A	WO 98 54713 A (DILLA LIMITED C) 3 December 1998 (1998-12-03) ---	
A	US 5 748 119 A (KO JUNG-WAN) 5 May 1998 (1998-05-05) ---	
A	US 4 603 413 A (SINJOU JOHANNES P ET AL) 29 July 1986 (1986-07-29) ---	
A	EP 0 347 934 A (SONY CORP) 27 December 1989 (1989-12-27) -----	

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0918326	A	26-05-1999	EP 0918326 A1	26-05-1999
US 5699434	A	16-12-1997	EP 0791923 A2	27-08-1997
			JP 9288864 A	04-11-1997
			US 6278386 B1	21-08-2001
			US 5828754 A	27-10-1998
EP 0854482	A	22-07-1998	US 6043764 A	28-03-2000
			EP 0854482 A1	22-07-1998
			JP 10208405 A	07-08-1998
WO 0074053	A	07-12-2000	AU 5088500 A	18-12-2000
			BR 0006159 A	17-04-2001
			CN 1310841 T	29-08-2001
			EP 1101222 A1	23-05-2001
			WO 0074053 A1	07-12-2000
			GB 2355575 A	25-04-2001
WO 9854713	A	03-12-1998	AU 7228298 A	30-12-1998
			BR 9804931 A	08-09-1999
			CN 1236468 T	24-11-1999
			EP 0916134 A1	19-05-1999
			WO 9854713 A1	03-12-1998
			JP 2001507849 T	12-06-2001
US 5748119	A	05-05-1998	KR 165441 B1	20-03-1999
			CN 1152217 A	18-06-1997
			DE 19637469 A1	20-03-1997
			GB 2305582 A ,B	09-04-1997
			JP 2939185 B2	25-08-1999
			JP 9181609 A	11-07-1997
			NL 1004050 C2	10-05-1999
			NL 1004050 A1	20-03-1997
US 4603413	A	29-07-1986	NL 8303859 A	03-06-1985
			AU 570881 B2	24-03-1988
			AU 3525884 A	16-05-1985
			BE 901020 A1	08-05-1985
			CA 1224266 A1	14-07-1987
			CH 665726 A5	31-05-1988
			DE 3438565 A1	23-05-1985
			ES 537436 D0	16-10-1985
			ES 8601542 A1	16-02-1986
			FR 2559935 A1	23-08-1985
			GB 2149560 A ,B	12-06-1985
			JP 60115072 A	21-06-1985
			SE 455028 B	13-06-1988
			SE 8405573 A	11-05-1985
EP 0347934	A	27-12-1989	JP 1321733 A	27-12-1989
			JP 2974678 B2	10-11-1999
			CA 1323423 A1	19-10-1993
			DE 68920918 D1	16-03-1995
			DE 68920918 T2	24-05-1995
			EP 0347934 A2	27-12-1989
			KR 175920 B1	15-04-1999
			US 5077721 A	31-12-1991

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.